




eW Profile Powercore

Ultra-low profile, white light LED under cabinet fixture















How to Order

eW Profile Powercore offers multiple power, fixture length, and fixture connection options to accommodate nearly any under-cabinet application. Fixtures are available in three lengths, with a range of jumper cables for adding space between fixtures or splitting fixture runs as needed.


To order a complete eW Profile Powercore solution, choose a line voltage connection type, any combination of fixture lengths, and the fixture connectors you need for your lighting design.





For complete ordering details and specifications, refer to the eW Profile Powercore Ordering Information Specification Sheet available online at www.philipscolorkinetics.com/essentialwhite/ewprofile/


<p>1 Line voltage connection options</p> <p>North America Installations</p>  <p>Switched leader cable</p>  <p>Switched wiring compartment</p>  <p>Wiring compartment</p> <p>Outside North America Installations</p>  <p>Leader cable</p>	<p>2 Fixture options</p> <p>Length</p>  <p>9.25 in (235 mm) / 19.25 in (489 mm) / 39.25 in (997 mm)</p> <p>Housing Color</p>  <p>White Gray Black</p> <p>Color Temperature</p>  <p>3000 K 4000 K</p> <p>Voltage 100 VAC / 120 VAC / 220 – 240 VAC</p>	<p>3 Fixture connection options</p>  <p>End-to-End connector</p>  <p>6 in (152 mm) Jumper Cable</p>  <p>12 in (305 mm) Jumper Cable</p>  <p>18 in (457 mm) Jumper Cable</p>  <p>5 ft (1.5 m) Jumper Cable</p>  <p>“Y” Jumper Cable</p>  <p>Mounting Track</p>
--	--	---

1 Select Line Voltage Connection Options

- 

Leader Cable and Terminator for permanent installations outside of North America. Includes a 10 ft (3 m) Leader Cable and Terminator. Available in white or black.
- 

Permanent Wiring Compartment and Terminator for permanent installations in North America. Use a Jumper Cable to connect the Wiring Compartment to the first fixture in a run. Available in white, black, or gray with black cables.
- 

Switched Portable Leader Cable and Terminator for portable installations in North America. Directly connects to the first fixture (right side only). The 10 ft (3 m) Leader Cable plugs into a standard 120 VAC outlet. Available in white, black, or gray with black cables.
- 


Switched Permanent Wiring Compartment and Terminator for permanent installations in North America. Connects to first fixture (left or right side) in a run. Available in white, black, or gray with black cables.




2 Select Fixture Options



9.25 in (235 mm)



19.25 in (489 mm)



39.25 in (997 mm)



eW Profile Powercore fixtures are available in any combination of three fixture lengths, two color temperatures, three input voltages, and three housing colors. You can select Leader Cables and optional Jumper Cables to match your fixtures' input voltage and housing color.


Select your fixture options, then refer to the Ordering Information Spec Sheet at www.philipscolorkinetics.com/l/essentialwhite/ewprofile/ for ordering details.

Fixture Lengths	Color Temperatures	Input Voltages	Housing Colors
9.25 in (235 mm)	3000 K (warm)	100 VAC	White
19.25 in (489 mm)		120 VAC ENERGY STAR®	Black
39.25 in (997 mm)	4000 K (cool)	220 – 240 VAC	Gray


3 Select Fixture Connection Options




End-to-End Connectors connect fixtures in a solid linear run. You can use any combination of fixture lengths in a run. End-to-End Connectors are available in packs of 5, in white, black, or gray



Jumper Cables add extra space between fixtures in a run or series. White and black Jumper Cables are available for either 100 and 220 – 240 VAC or 120 VAC, in lengths of 6 in (152 mm), 12 in (305 mm), 18 in (457 mm), or 5 ft (1.3 m).



"Y" Jumper Cables and Terminators split a single run of fixtures into two separate runs. For instance, you can position a power source in the center of a run by using a "Y" Jumper Cable to run fixtures to the left and the right. 16.5 in (419 mm) "Y" Jumper Cables are available for either 100 and 220 – 240 VAC or 120 VAC, in white or black.




Optional **Mounting Track** ensures straight runs of fixtures in linear applications. White, Black, or Gray Mounting Track is available in packs of 25, in 9 in (229 mm), 19 in (483 mm), and 39 in (991 mm) lengths.



A complete installation of eW Profile Powercore includes a line voltage connection option, eW Profile Powercore fixtures, fixture-to-fixture connectors, a terminator, and optional mounting track.

For complete product details, including photometrics, specifications, and installation instructions, refer to the eW Profile Powercore Product Guide available online at www.philipscolorkinetics.com/l/essentialwhite/ewprofile/

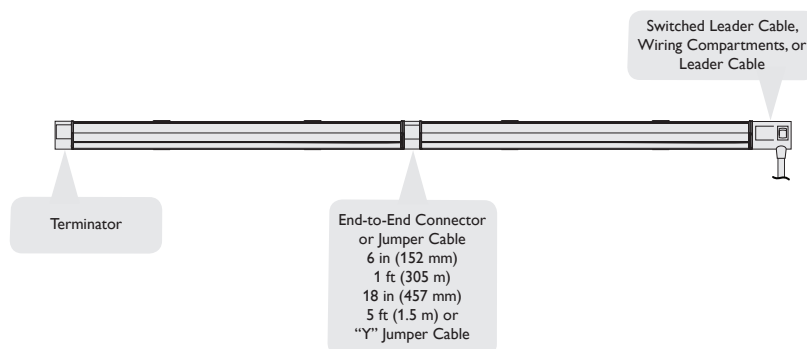

Philips Color Kinetics
3 Burlington Woods Drive
Burlington, Massachusetts 01803 USA
Tel 888.385.5742
Tel 617.423.9999
Fax 617.423.9998
www.philipscolorkinetics.com

Copyright © 2008 – 2011 Philips Solid-State Lighting Solutions, Inc. All rights reserved. Chromacore, Chromasic, CK, the CK logo, Color Kinetics, the Color Kinetics logo, ColorBlast, ColorBlaze, ColorBurst, eW Fuse, ColorGraze, ColorPlay, ColorReach, iW Reach, eW Reach, DIMand, EssentialWhite, eW, iColor, iColor Cove, IntelliWhite, iW, iPlayer, Optibin, and Powercore are either registered trademarks or trademarks of Philips Solid-State Lighting Solutions, Inc. in the United States and / or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice. DAS-000005-07 R04 09-11